

DEMOSTAR

CLEMENT



The DemoStar's rugged barn door tailgate of 1/4-inch AR450 steel is supported by extra heavy-duty hinges. 1-1/8-inch greaseable hinge pins and 1-1/2-inch latch bars assure long, low maintenance operation.

Tough-as-nails demolition trailers that you would expect from "America's leader."

Designed to perform with rugged efficiency, the DemoStar handles a wide variety of demolition materials.

DemoStar's classic Clement Bathtub body of abrasion-resistant AR450 steel is rugged, yet designed to minimize weight while handling the really tough loads. A recognizable characteristic of Clement's bathtub design is longitudinal braces that efficiently support the body.

Available in either frametype or frameless, the Clement DemoStar can be configured to suit many different demolition applications.




CLEMENT
America's leader
IN DUMP TRAILERS

The company reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein.

CLEMENT DEMOSTAR

*Rugged new
demolition trailers
with extra value!*

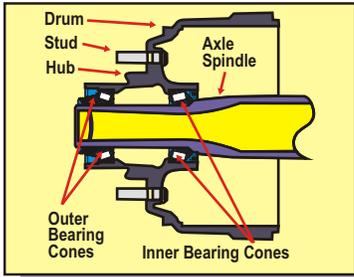

Extra Value, AR450 steel

Using the extra strong AR 450 steel, Clement offers the highest strength-to-weight ratio in the industry.

Extra Value, a firm foundation

Building a trailer is a lot like building a house. Put as much strength possible in the foundation and the structure will be strong and it will last! With every trailer we start with 25,000-lb., 102-inch wide Meritor axles with parallel spindles and common inner and outer bearings that greatly increase both bearing and

axle life.

None of our competition has a stronger foundation than the one that's standard on every Clement trailer, and few even come close.

Slope or Invert (No Doghouse)



Extra Value, crowning touch

That deep lustrous shine on every trailer is pretty, but it's real function is to protect the steel from corrosion. The high quality urethane paint used in combination with a rust resisting undercoat, is designed to do just that! Another example of going the extra mile to provide the utmost value for the demolition contractor.

Frame and Frameless Demolition Trailer

Specifications

Body Lengths:

Frameless - 26' - 37'

Frame - 26' - 34'

Floor: 1/4-inch AR450

Sides: 1/4-inch AR450, 62-inch height

Tailgate: 1/4-inch, AR450, barn door

Nose: 3/16-inch, AR400

Longitudinals: 4 x 8 x 3/16-inch tubing

Top rail: 4 x 4 x 3/16-inch tubing

3/16-inch side braces

Body Longitudinals:

Frameless - 4 x 8 x 3/16 inch tubing

Frame - 4 x 4 x 3/16 inch tubing

26' - 37' inside body length

62" & 72" sides for 50-cubic yard capacity

Hoist: 8" - 5 Stage

Suspension:

Standard: 50 lb. Single Point

Option: Air Ride

Option: Multi-Axle

Axles: (2) 102-inch, 25,000-lb., 5-inch round

Meritor with common inner and outer

bearings

Wheels: 8.25 x 24.5, 10-hole hub-piloted disc

Tires: 11R24.5 R194 Bridgestone

Brakes: Air 16-1/2 x 7-inch outboard cast

drum



Clement is just "down the road."

Clement's nationwide network of dealers means that Clement quality service and genuine Clement replacement parts are just "down the road" not across the country.

CLEMENT
America's leader
IN DUMP TRAILERS

P. O. Box 914, Minden, LA 71058-0914

1-800-562-5948, FAX: 318-371-4369

E-Mail: sales@clementind.com, Web site: <http://www.clementind.com>

For more information, call your local Clement Distributor: